

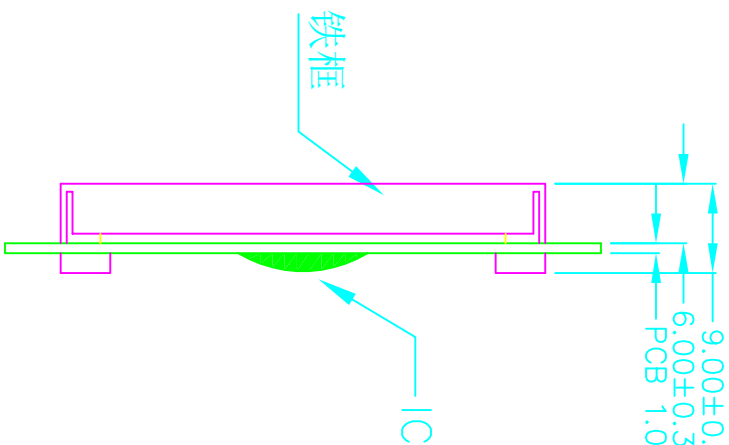


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-12-19

INTERFACE	
1	CS1
2	CS2
3	VSS
4	VDD(5V)
5	V0
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	RST
18	VOUT
19	LED-A(5V)
20	LED-K

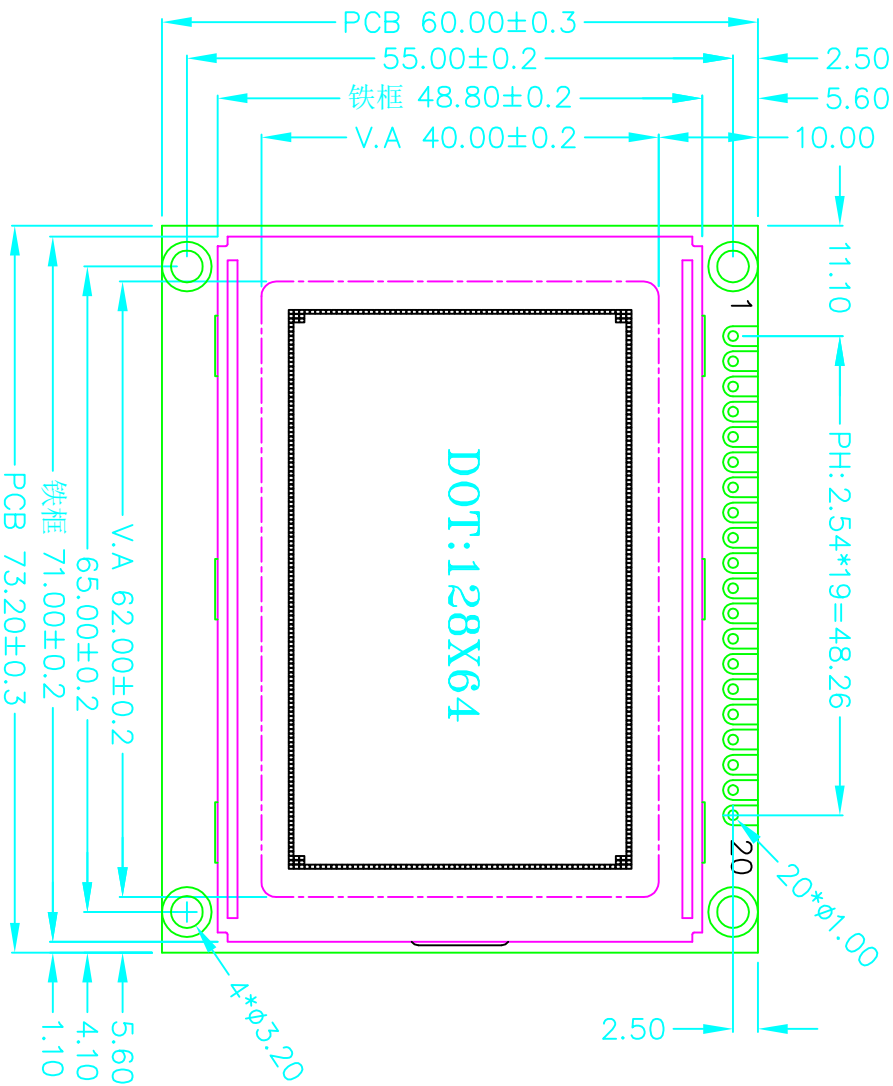

DOT SIZE:

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=10.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: 0107, 0108

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/12/19	HSM12864E	1 OF 1	
CHECKED BY:					
CUSTOM NO.:					
DO NOT SCALE THIS DRAWING.					
PROJECTION			DATE:	2011/12/19	