

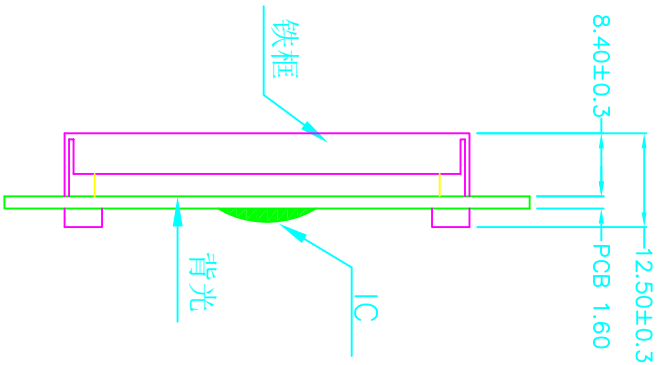


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-6-29

IF	SOMBLE
1	GND
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	N.C
17	RST
18	N.C
19	LED-A(+5V)
20	LED-K

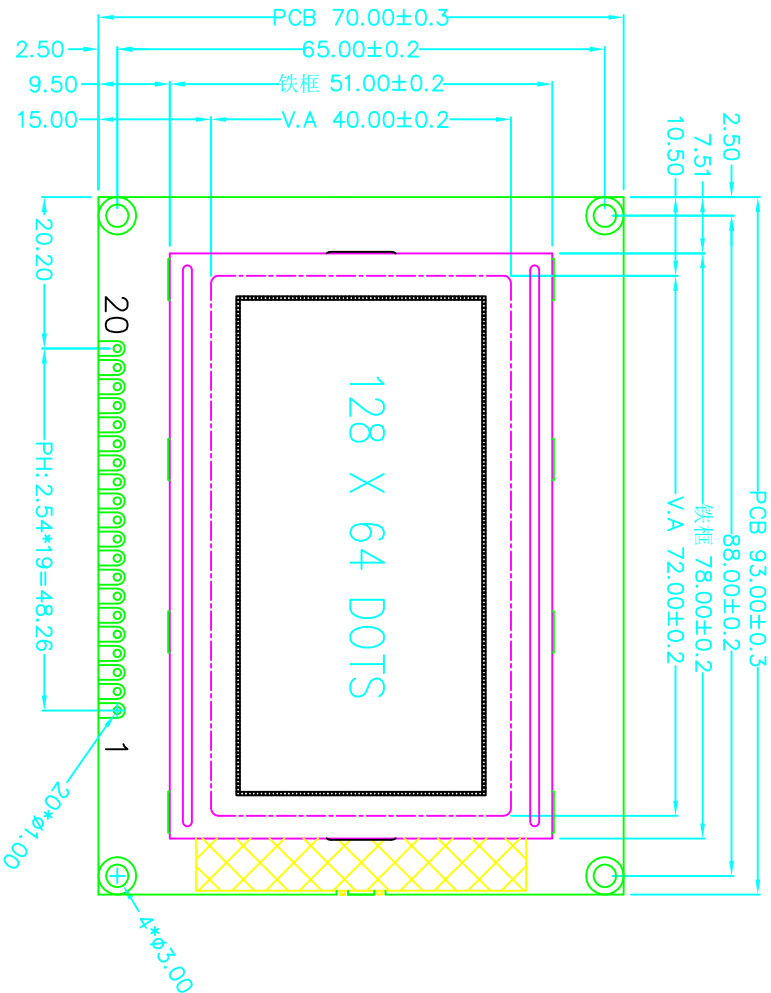

- SPECIFICATION:
- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
 - 2). DUTY: 1/32. BIAS: 1/6. VOP=5.0V
 - 3). VIEWING ANGLE: 6 0' CLOCK
 - 4). DRIVE VOLTAGE: 5.0V
 - 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
 - 6). BACKLIGHT: WHITE I=80MA
 - 7). DRIVE IC: ST7920

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:
Tolerance:			2011/6/29	HSM12864M		1 of 1
DESIGN BY:	WZQ					DATE:
CHECKED BY:						2011/6/23
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.		