

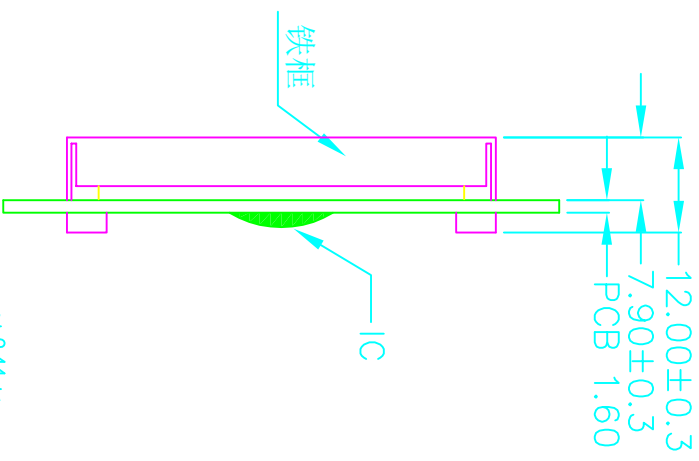


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2010-06-17

IF	SOMBLE
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RAW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	N.C
17	RST
18	VOUT
19	LED-A(5V)
20	LED-K

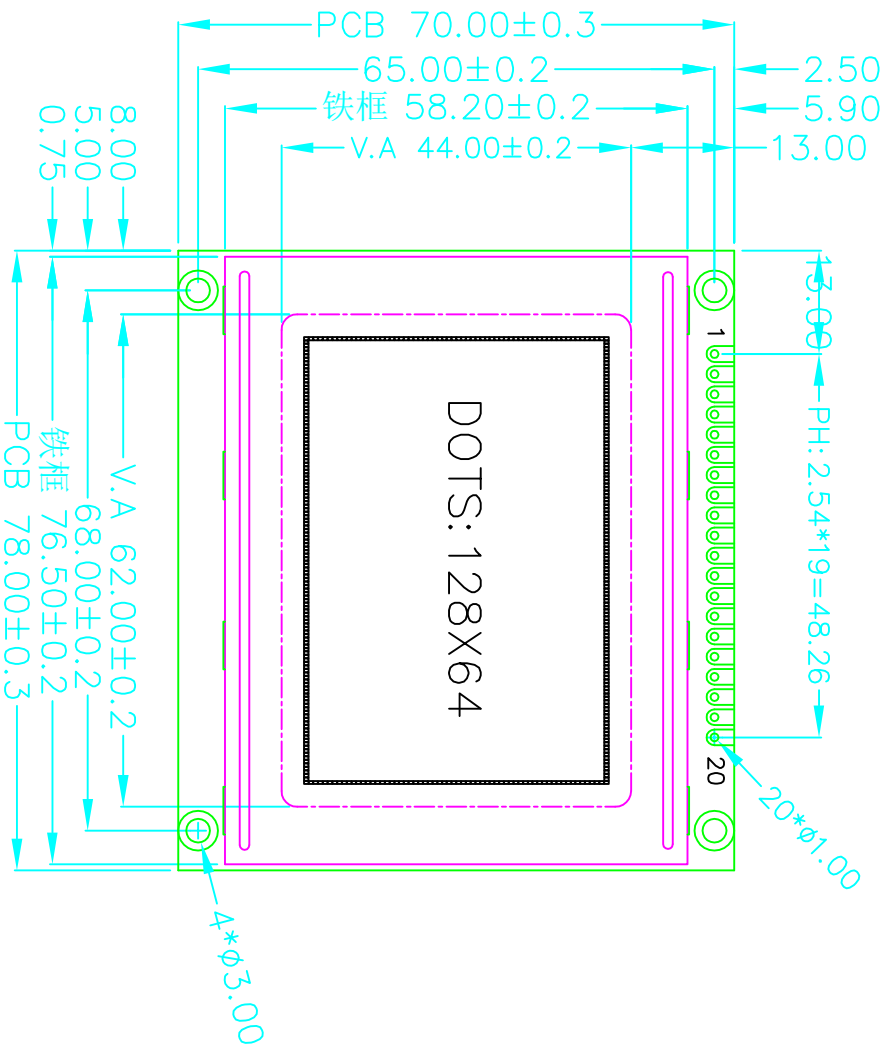

DOT SIZE:

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/6. VOP=5.0V
- 3). VIEWING ANGLE: 6 0'CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: ST7920

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/6/23	HSM12864S	1 OF 1	
CHECKED BY:					
CUSTOM NO.:					
DO NOT SCALE THIS DRAWING.					
PROJECTION			DATE:	2011/6/23	