

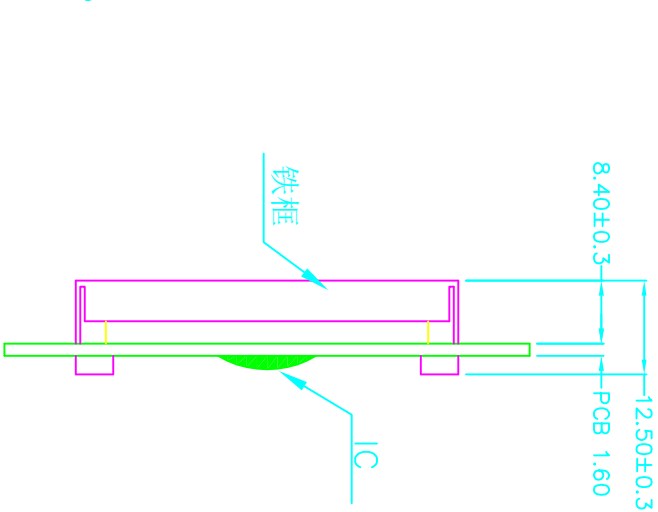


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2012-3-16

IF	SOMBLE
1	VSS
2	VDD(5.0V)
3	V0
4	/WR
5	/RD
6	/CE
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	FS
16	C/D
17	/RST
18	VOUT
19	LED-A(+5V)
20	LED-K

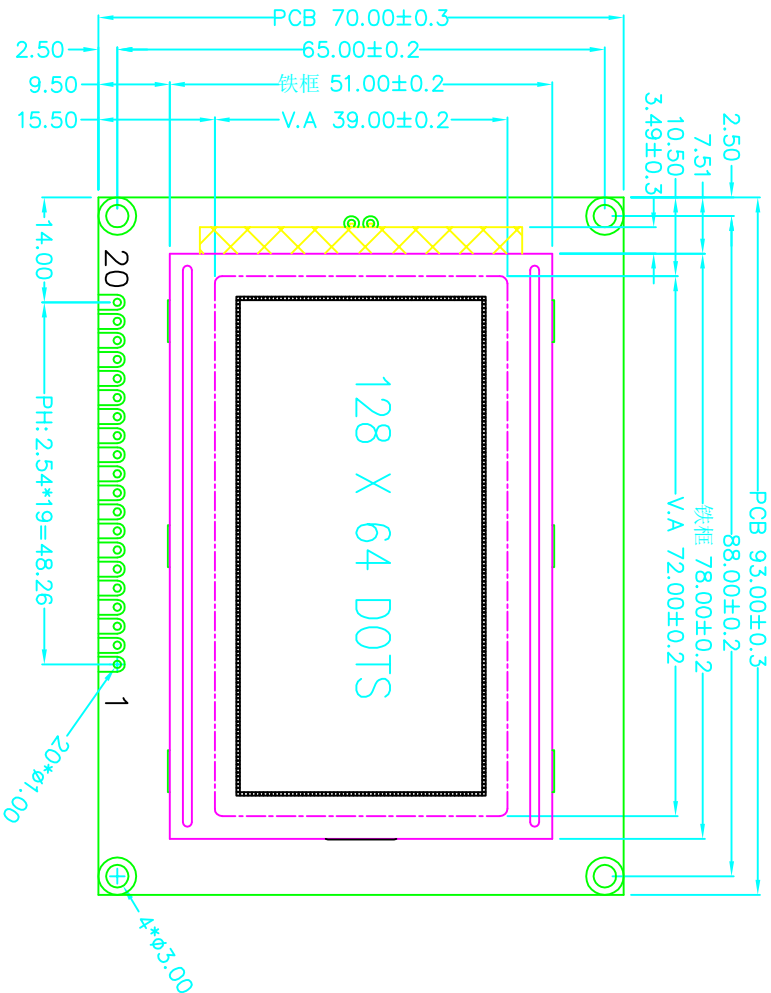

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=8.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: Y-G I=80MA
- 7). DRIVE IC: T6963

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	吴子强 (WZQ)	2012/3/16	HSM12864K	PROJECTION	1 OF 1
CHECKED BY:			DO NOT SCALE THIS DRAWING.	DATE:	2012/3/16
CUSTOM NO.:					