

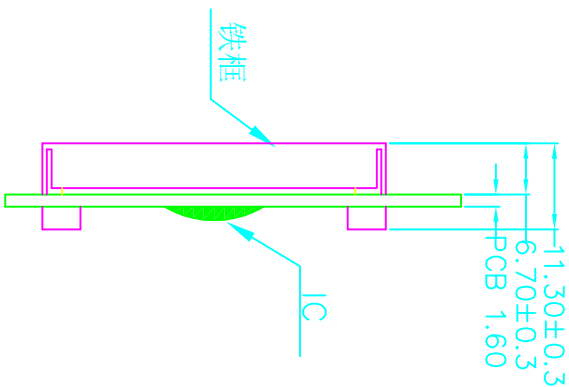


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-11-12

INTERFACE	
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	RAW
11	RS
12	V0
13	VDD(5V)
14	VSS
15	CSA
16	CSB
17	VEE
18	RST
19	LED-A(5V)
20	LED-K

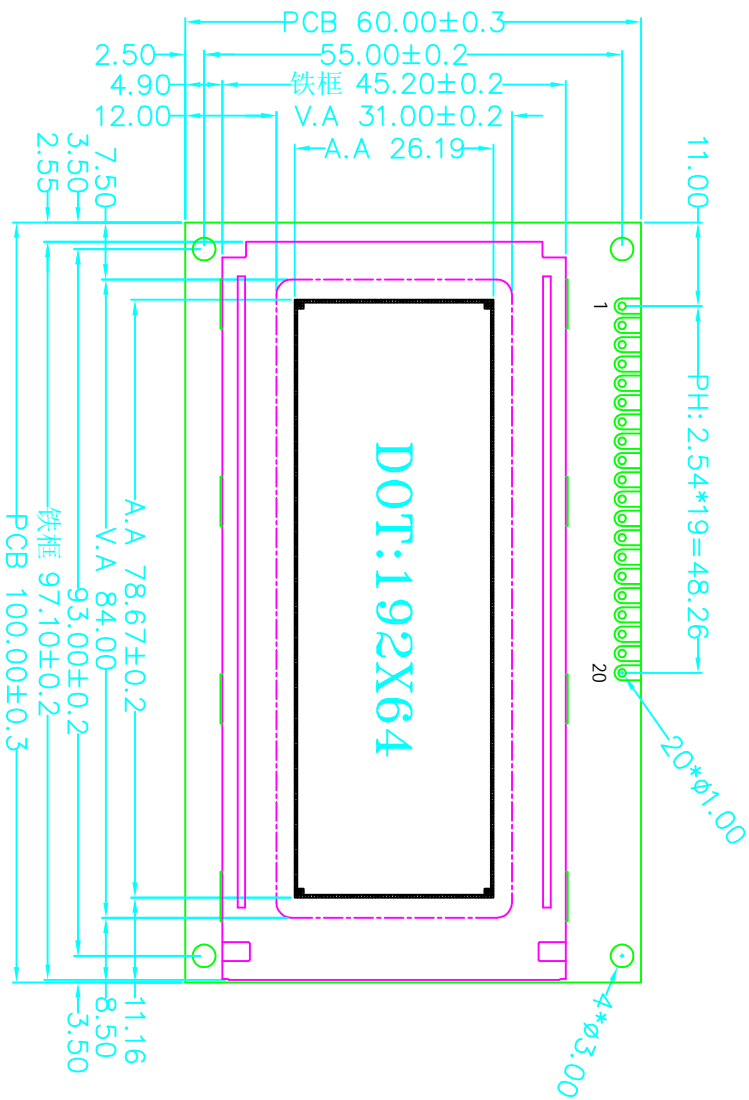

DOT SIZE:

- SPECIFICATION:
- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
 - 2). DUTY: 1/64. BIAS: 1/9. VOP=12.5V
 - 3). VIEWING ANGLE: 6 0'CLOCK
 - 4). DRIVE VOLTAGE: 5.0V
 - 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
 - 6). BACKLIGHT: WHITE I=80MA

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/11/12	HSM19264T	1 OF 1	
CHECKED BY:				DATE:	
CUSTOMER:				2011/11/12	

DO NOT SCALE THIS DRAWING.