



INTERFACE	
1	VSS
2	VDD
3	V0
4	RS (CS)
5	RW(SID)
6	E(SCLK)
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A
16	LED-K

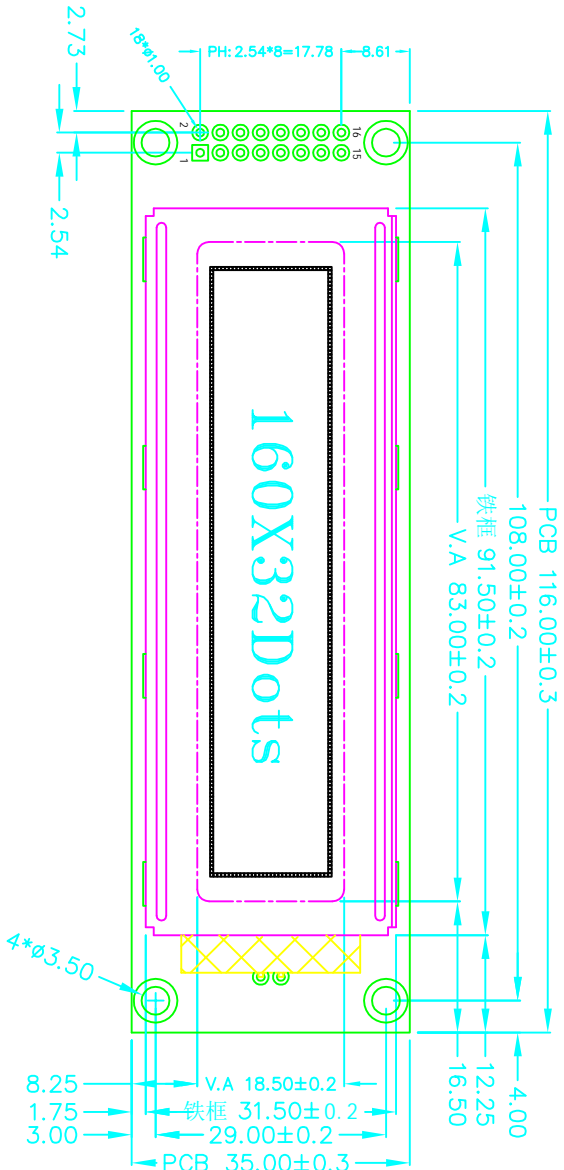

DOT SIZE:

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSPARENT
- 2). DUTY: 1/32. BIAS: 1/5. VOP=4.4V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: Y-G I=40MA
- 7). DRIVE IC: ST7920

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/12/22	HSM16032D	PROJECTION	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/12/22

DO NOT SCALE THIS DRAWING.