


| VER | DETAIL DESCRIPTION | DATE     |
|-----|--------------------|----------|
| 00  | FIRST ISSUE        | 2011-8-4 |

| INTERFACE |           |
|-----------|-----------|
| 1         | VSS       |
| 2         | VDD(3.3V) |
| 3         | V0        |
| 4         | RES       |
| 5         | RS        |
| 6         | RW        |
| 7         | E1        |
| 8         | E2        |
| 9         | PSB       |
| 10        | DB0       |
| 11        | DB1       |
| 12        | DB2       |
| 13        | DB3       |
| 14        | DB4       |
| 15        | DB5       |
| 16        | DB6       |
| 17        | DB7       |
| 18        | LED-A(5V) |
| 19        | LED-K     |
| 20        | VOUT      |

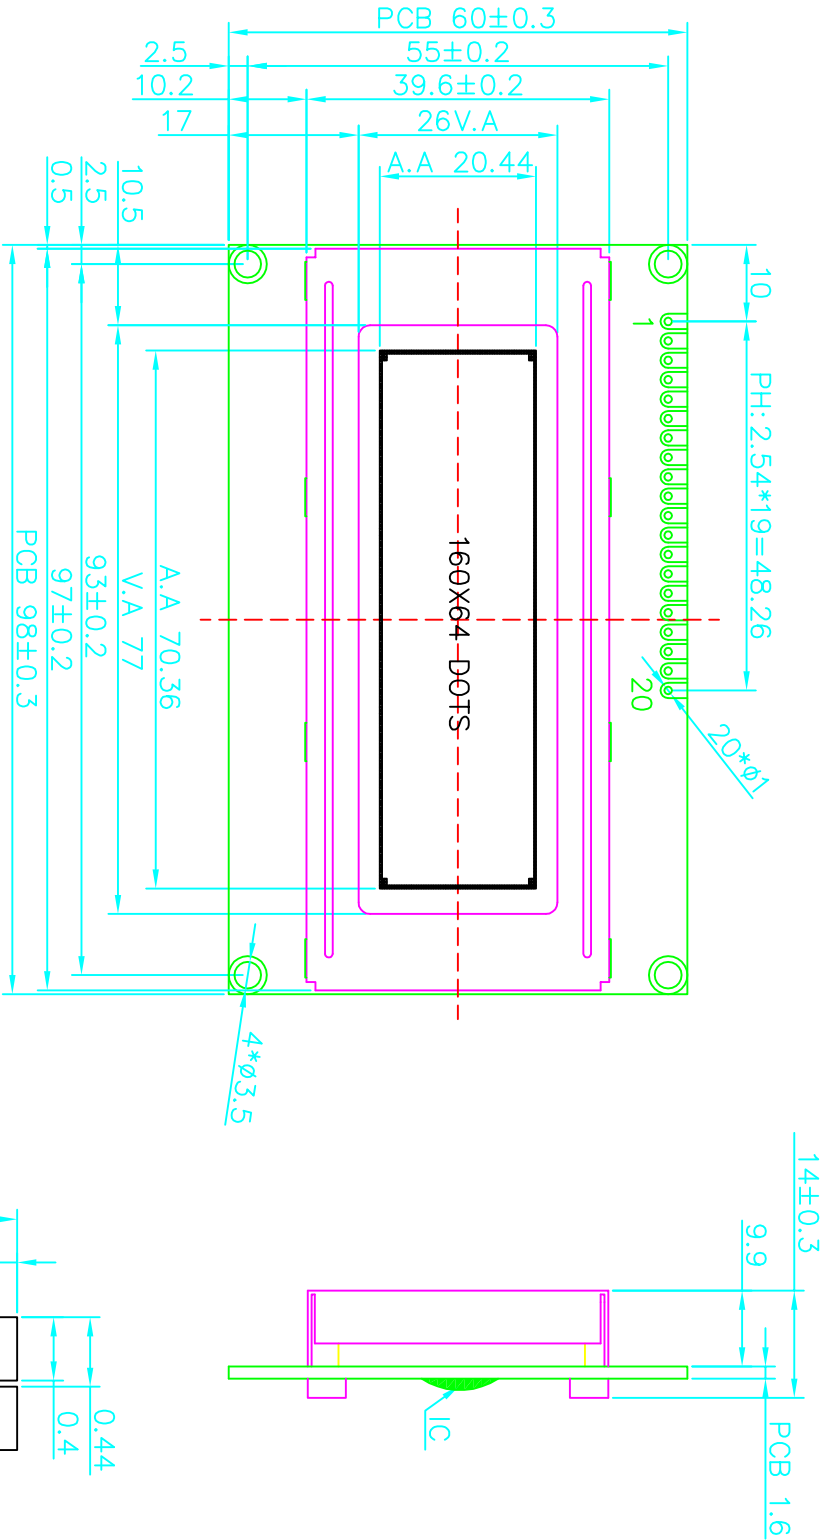

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 0'CLOCK
- 4). OPERATING TEMPERATURE: -10~60°C  
STORAGE TEMPERATURE: -20~70°C
- 5). BACKLIGHT: WHITE I=40MA
- 6). DRIVE POWER: VDD=3.3V

Shenzhen Huaxianjing Technology Co.,Ltd

|                        |       |           |           |              |          |
|------------------------|-------|-----------|-----------|--------------|----------|
| Unspecified Tolerance: | ±0.20 | UNITS: mm | DATE:     | MODE NUMBER: | SHEET:   |
| DESIGN BY:             | WZQ   | 2011/8/4  | HSM16064A | PROJECTION   | 1 OF 1   |
| CHECKED BY:            |       |           |           |              | DATE:    |
| CUSTOM NO.:            |       |           |           |              | 2011/8/4 |

DO NOT SCALE THIS DRAWING.