


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2011-11-8

INTERFACE	
1	FG
2	VSS
3	VDD(5V)
4	V0
5	/MR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	VEE
21	LEDA(5V)
22	LEDK

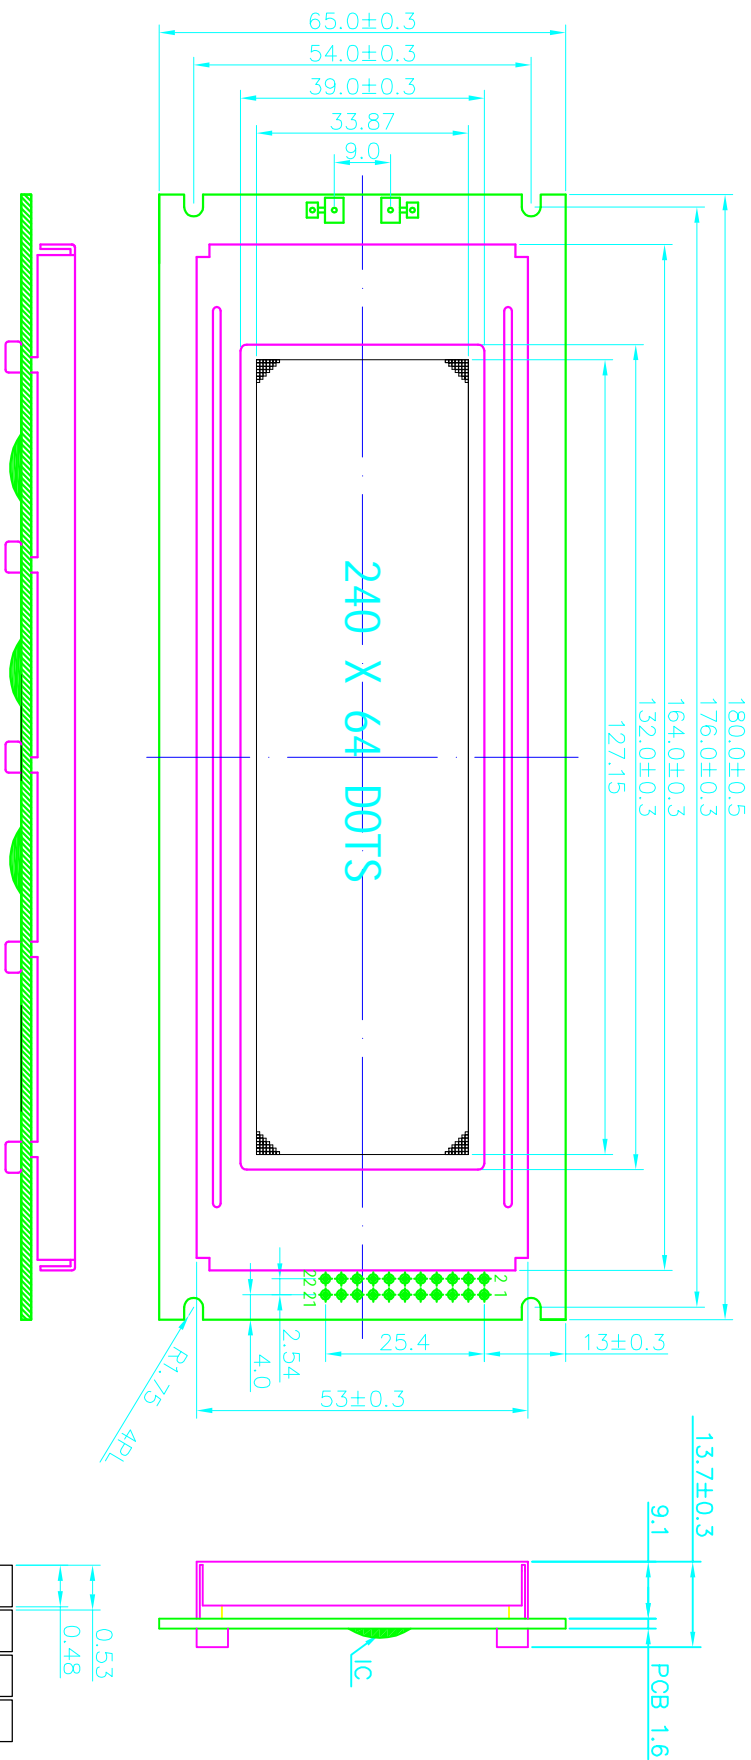

SPECIFICATION:

- 1). STN(GARY)/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=12.2V
- 3). VIEWING ANGLE: 60°CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=120MA
- 6). DRIVE POWER: VDD=5.0V

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerances:	+0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WZQ	2011/1/8	HSM24064B		1 OF 1	
CHECKED BY:					DATE:	
CUSTOM NO.:					2011/1/8	

DO NOT SCALE THIS DRAWING.