



VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-30

INTERFACE:	
1	FG
2	VSS
3	VCC(5V)
4	V0
5	WR
6	RD
7	CS
8	C/D
9	RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	VEE
20	LED+(5V)

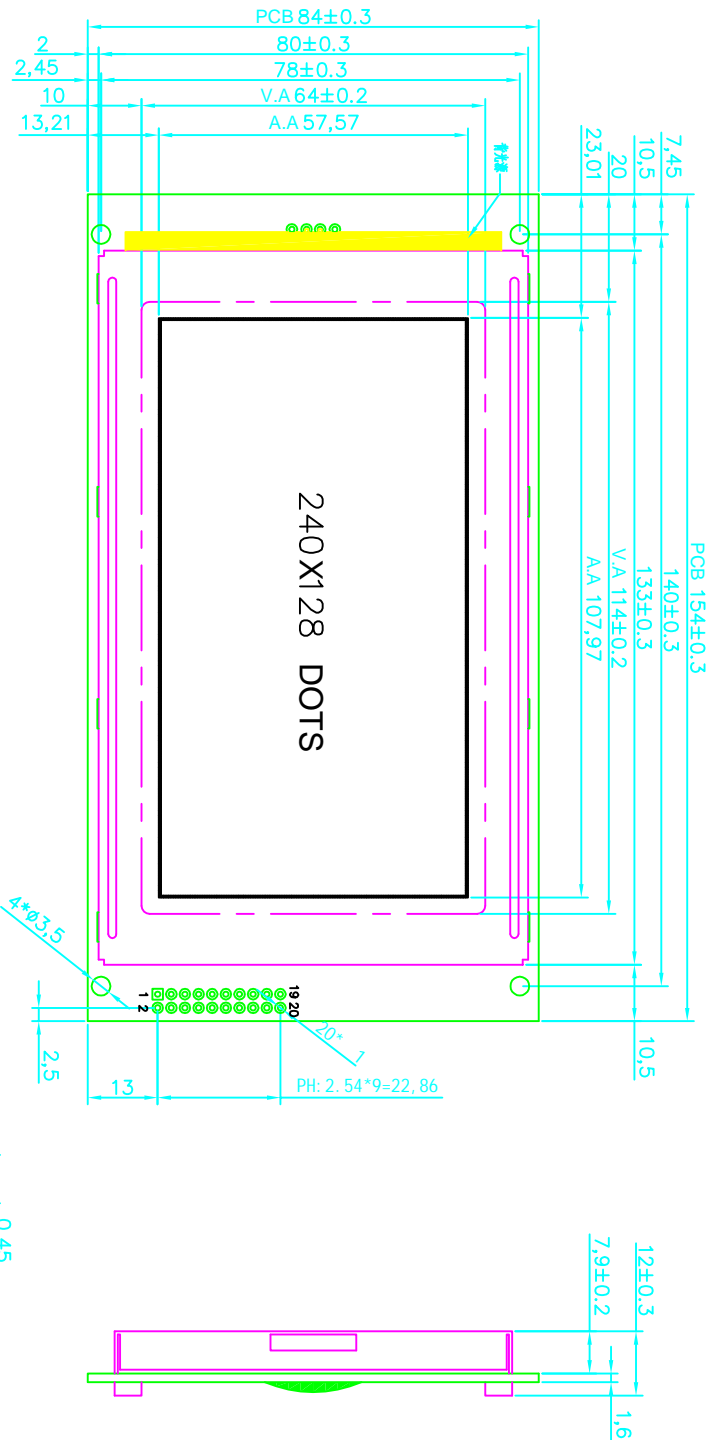

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/128 DUTY, 1/12 BIAS,VOP=18V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE,I=120mA
 LCM OPERATING VOLTAGE5.0V
 CONTROLLER/DRIVER IC:6963+Bonding IC

Shenzhen Huaxianjing Technology Co.,Ltd

Unspecified Tolerance: ±0.20	UNITS:mm	DATE:	MODE NUMBER:	SHEET:	DATE:
DESIGN BY: WZQ		2011/11/30	HSM240128E	1 OF 1	2011/11/30
CHECKED BY:					
CUSTOM NO.:					

DO NOT SCALE THIS DRAWING.

PROJECTION