


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2013-1-28

INTERFACE	
J1/J4	J2/J3
1 VSS	1 FG
2 VDD(6V)	2 V0
3 V0	3 VEE
4 /M/R	4 VSS
5 /R/D	5 VDD(6V)
6 ACS	6 GP
7 A0	7 LP
8 /RES	8 M
9 /D90	9 FLM
10 /D91	10 DIS
11 /D92	11 D3
12 /D93	12 D2
13 /D94	13 D1
14 /D95	14 D0
15 /D96	15 LEDA
16 /D97	16 LEDK

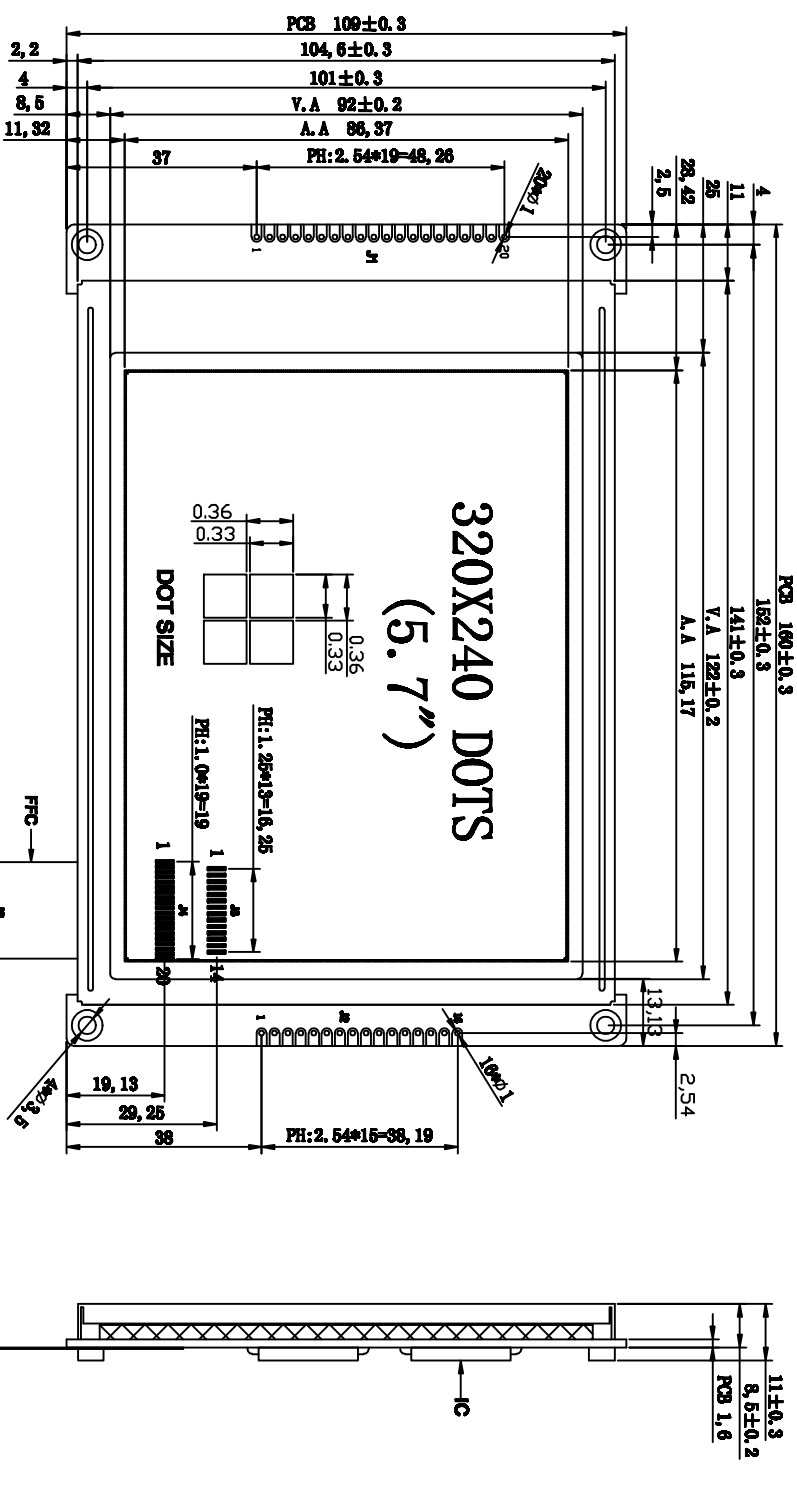

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240 DUTY, 1/17 BIAS, VOP=23V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE, I=160mA
 LCM OPERATING VOLTAGE: 5.0V
 CONTROLLER/DRIVER IC: RA8835

深圳华显晶科技有限公司

Unapproved Tolerance	48.20	UNIT: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN	BT:	VER:	2013/1/28	HSM/320240B-B	1 OF 1
CHECKED	BT:			DO NOT SCALE THIS DRAWING.	DATE:
CUSTOM IFC:					2013/1/28