


VER	DETAIL DESCRIPTION	DATE
00	FIRST ISSUE	2010-1-10

INTERFACE:	
1	VSS
2	VCC(5V)
3	V0
4	M/R
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VEE
19	LEDA
20	LEDK

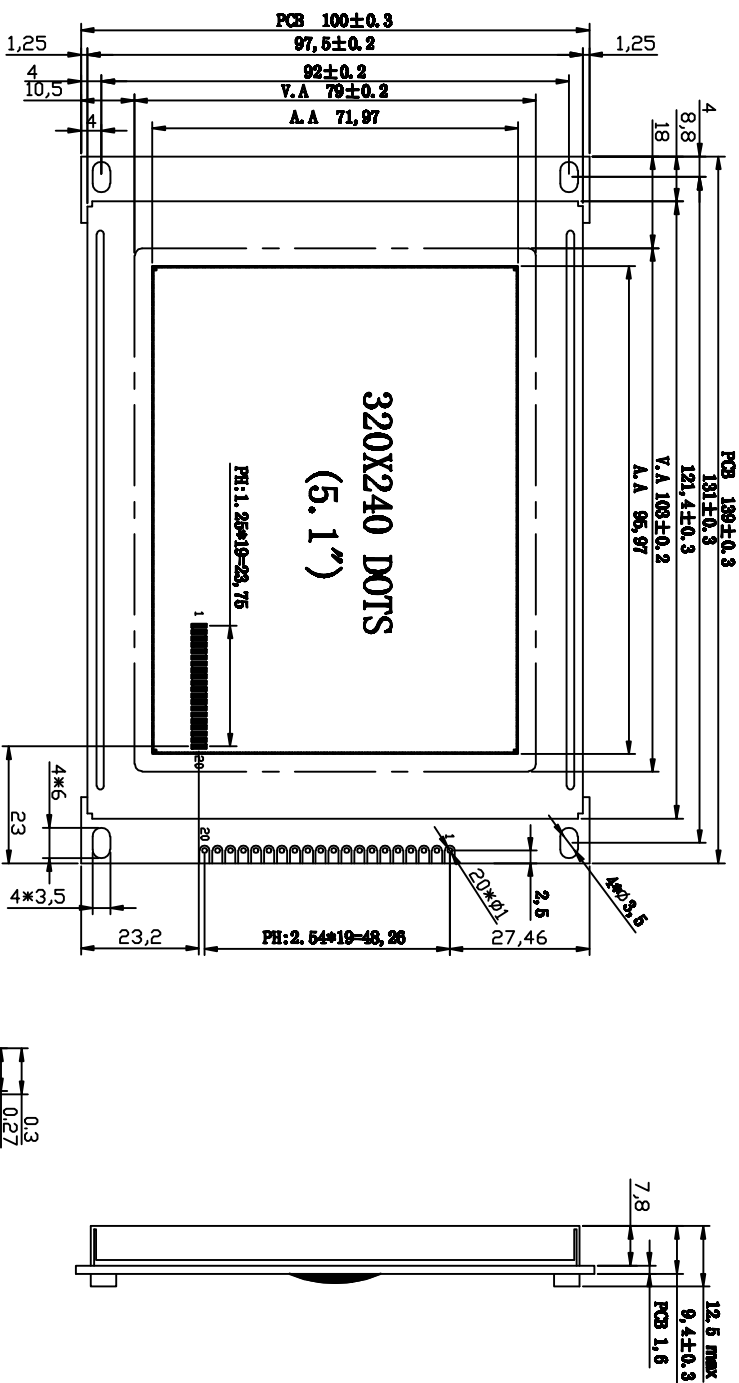

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240DUTY, 1/16 BIAS,VOP=25V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE I=160mA
 LCM OPERATING VOLTAGE5.0V
 CONTROLLER/DRIVER IC:RA8835

深圳华显晶显示技术有限公司

Unapproved Tolerance	48.50	UNIT: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZD	2010/1/10	LCM320240C	1 OF 1	
CHECKED BY:					
QUESTION NO:			DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 2010/1/10